



Specification of Thermoelectric Module

TEHC1-127012



Performance Curves at $T_h=27\text{ }^\circ\text{C}$

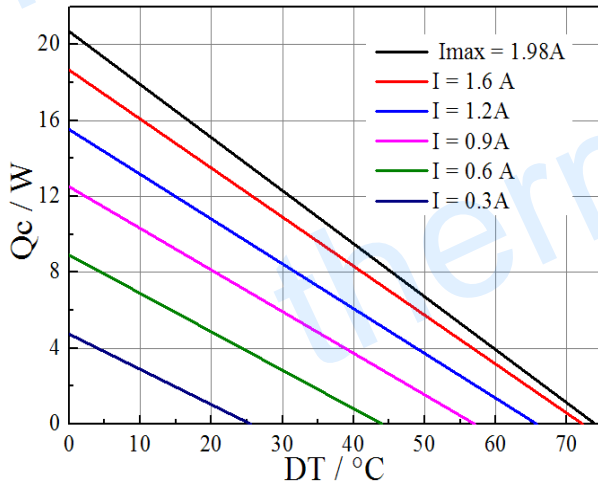



Performance Curves at $T_h=50\text{ }^\circ\text{C}$

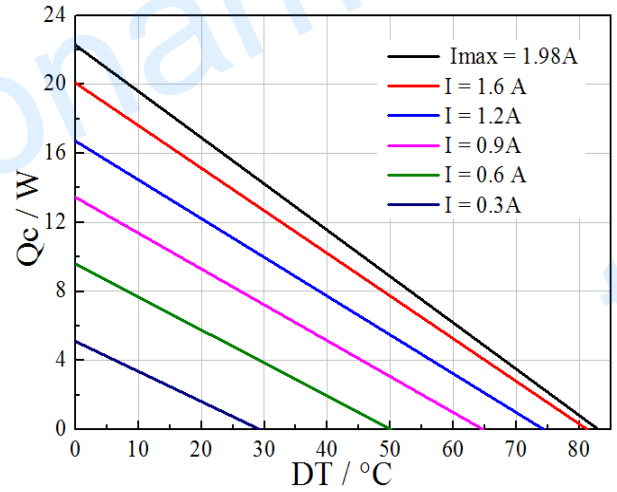

Standard Performance Graph $Q_c = f(DT)$

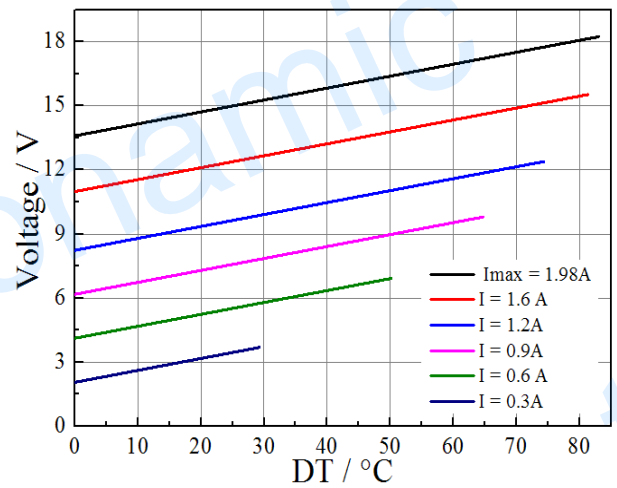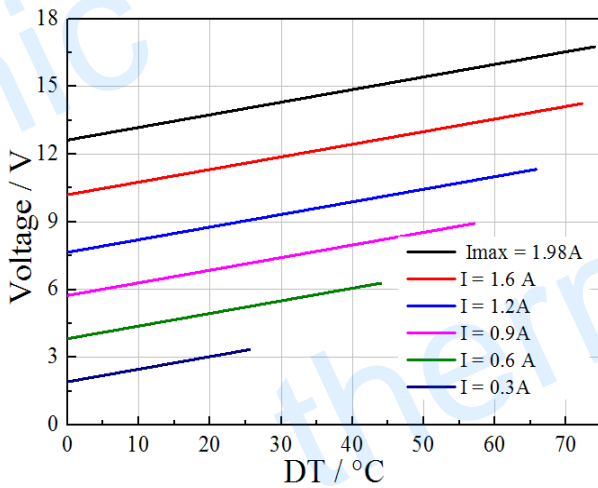

Standard Performance Graph $V = f(\Delta T)$

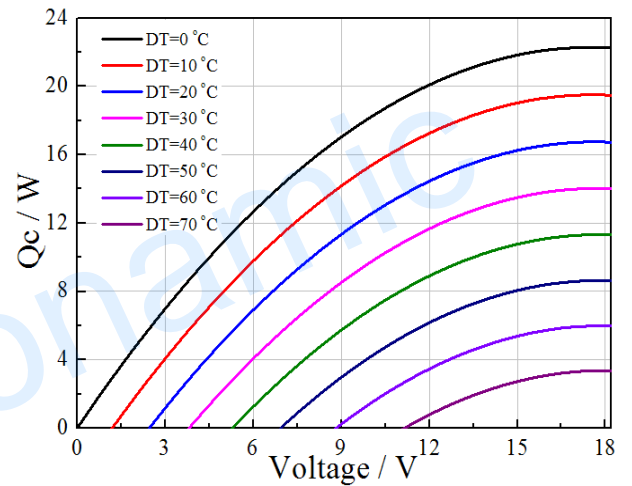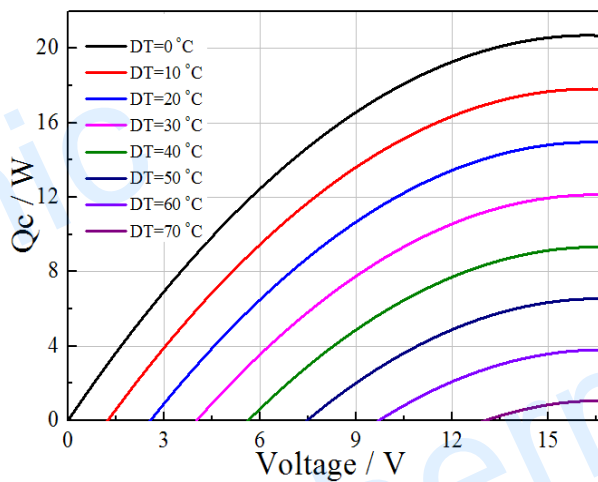


Standard Performance Graph $Q_c = f(V)$


Specification of Thermoelectric Module

TEHC1-127012



Performance Curves at Th=27 °C

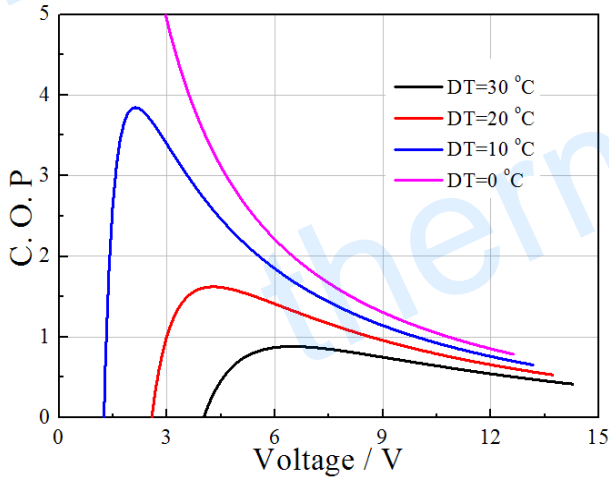

Performance Curves at Th=50 °C

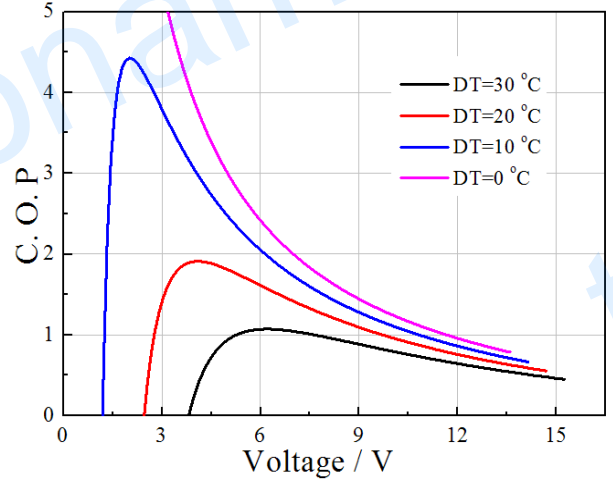

Standard Performance Graph COP = f(V) of ΔT ranged from 0 to 30 °C

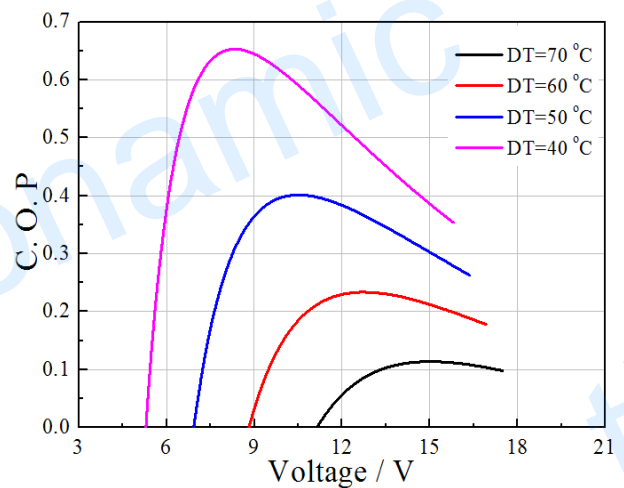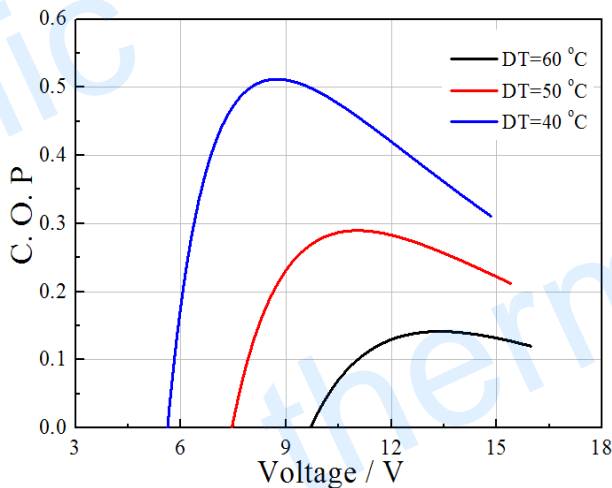

Standard Performance Graph COP = f(V) of ΔT ranged from 40 to 60/70 °C

Remark: The coefficient of performance (COP) is the cooling power Q_c /Input power ($V \times I$).

Operation Cautions

- Cold side of the module stucked on the object being cooled
- Operation below I_{max} or V_{max}
- Hot side of the module mounted on a heat radiator
- Operation or storage module below 100 °C
- Work under DC