





# Specification of Thermoelectric Module

**TES1-06320M**



## Performance Curves at Th=27 °C

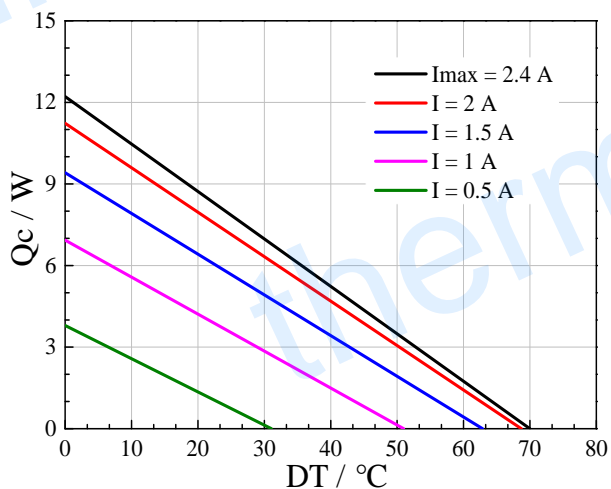



## Performance Curves at Th=50 °C

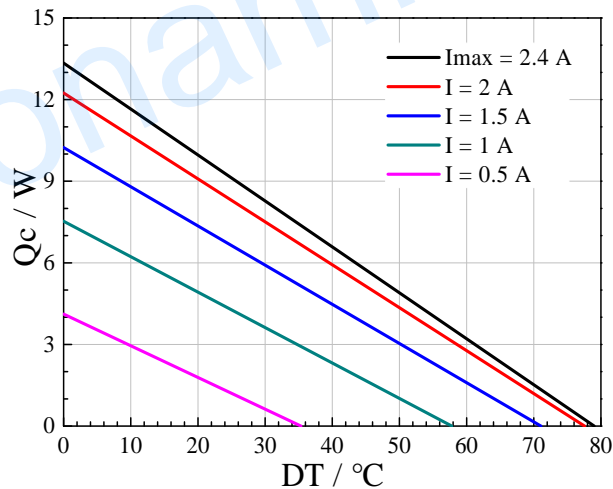

Standard Performance Graph  $Q_c = f(DT)$

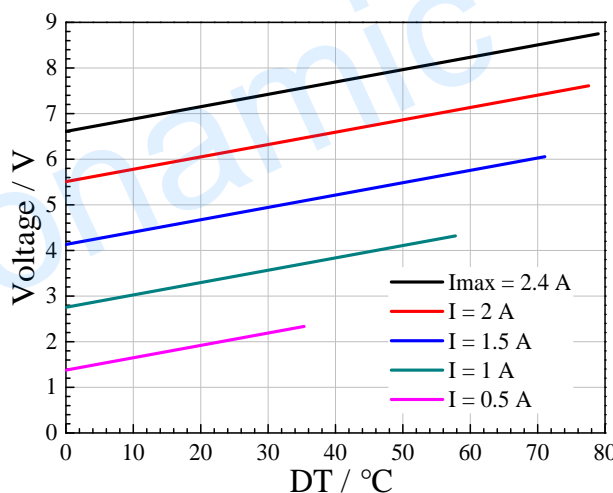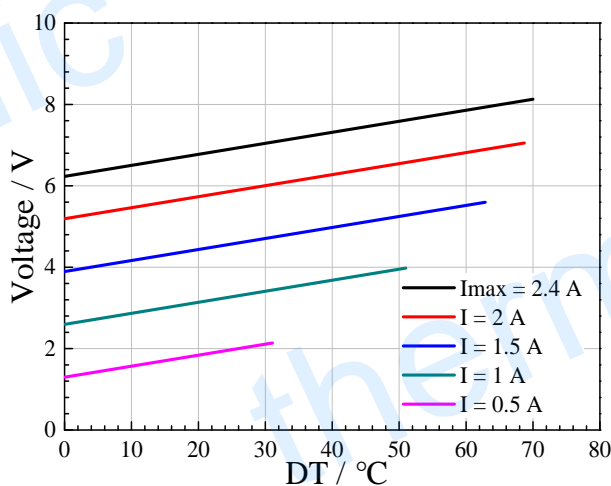

Standard Performance Graph  $V = f(DT)$

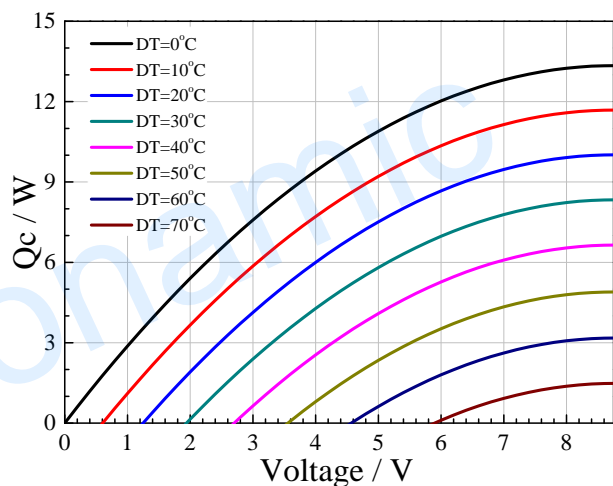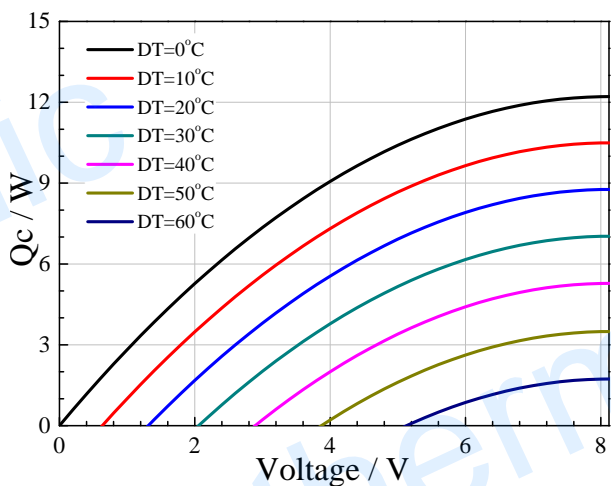


Standard Performance Graph  $Q_c = f(V)$


## Specification of Thermoelectric Module

TES1-06320M



Performance Curves at Th=27 °C

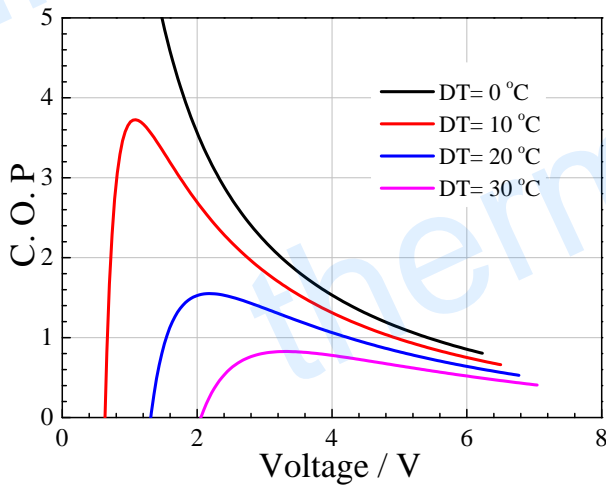

Performance Curves at Th=50 °C

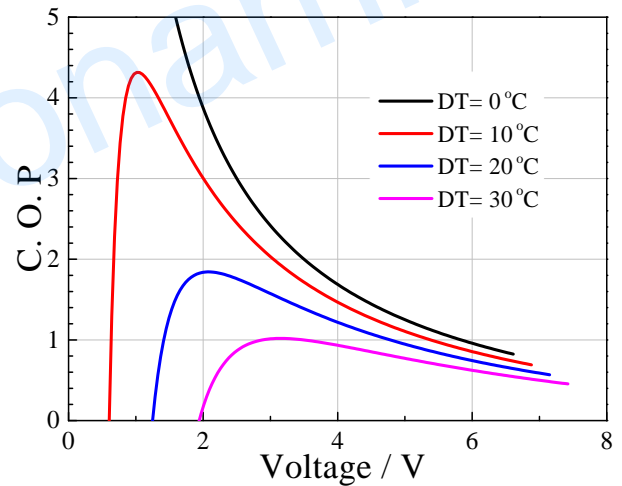

Standard Performance Graph COP = f(V) of DT ranged from 0 to 30 °C

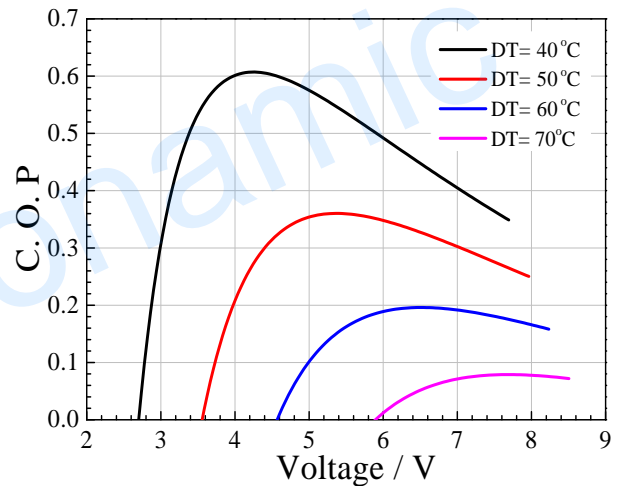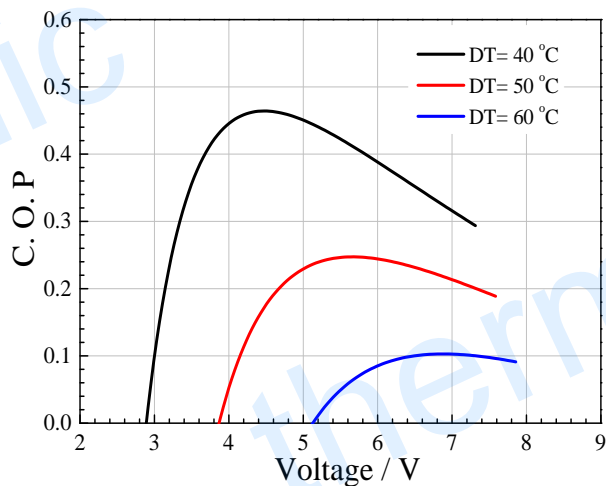

Standard Performance Graph COP = f(V) of DT ranged from 40 to 60/70 °C

**Remark:** The coefficient of performance (COP) is the cooling power  $Q_c$ /Input power ( $V \times I$ ).

### Operation Cautions

- Cold side of the module stucked on the object being cooled
- Hot side of the module mounted on a heat radiator
- Operation below  $I_{max}$  or  $V_{max}$
- Work under DC

**Note:** All specifications subject to change without notice.